


SPRO[®]

SPD80/2812R-EC

800TV Line Outdoor IR Dome Camera

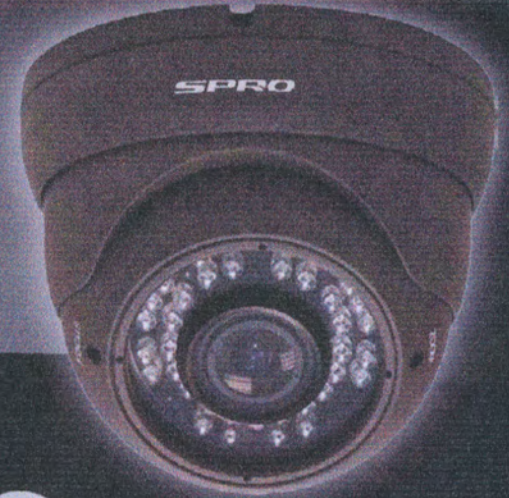

Key Features:

- SONY SENSOR
- 800 TVL (960H)
- 2.8~12mm Lens
- 36pcs IR LEDs Built-In
- 3-Axis Gimbal
- Dual Glass (w/o Infrared Reflection in Low Lux Environment)
- IP66 Waterproof Housing
- Up to 30 Meters IR


SPECIFICATIONS

Model Number	SPD80/2812R-EC
Image Sensor	SONY CMOS
Number of Pixels	PAL:976(H) x 582(V)
Horizontal Resolution	800 TVL (960H)
SYNC System	Internal Synchronization
Scanning System	progressive scanning
Sensitivity	0.1 Lux (F1.2)
S/N Ratio	≥48dB(AGC closed)
Auto Gain Control	Yes
White Balance	Yes

(continued)

(continued)

BLC	Auto
Video Output Signal	1 Vp-p Composite Video Output, 75Ω
IR LED Lighting Distance	20-30 meters (36pcs IR LEDs)
Power Supply	DC12V
Power Consumption	200mA (400mA IR on)
Lens Mount	2.8~12mm
Waterproof	IP66
Operating Temperature	-5°C - +45°C
Dimensions	120 (d) x 120 (w) x 105 (h) mm
Weight	Approx. 650g

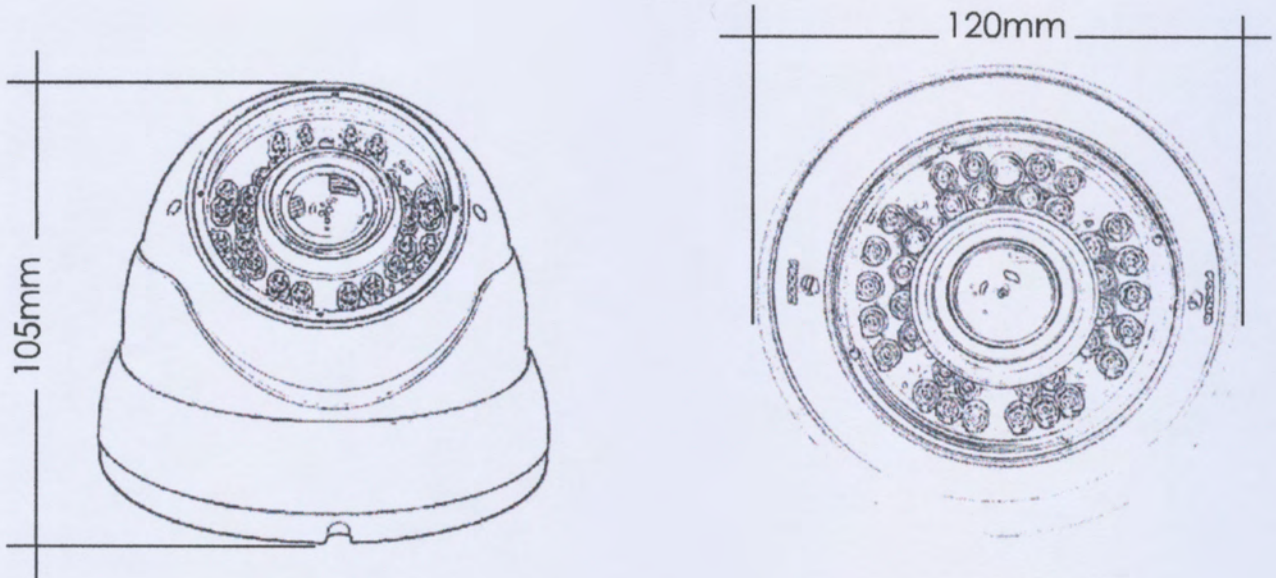

All specifications are subject to change without notice. Copyright © Luxrite Ltd. All rights reserved