




SPIPQ20/36R/EC

2MP IP Camera



Key Features:

- 2 Megapixel Sony sensor
- HD 1080P @ 25fps
- H.264 video compression
- 3.6mm LENS
- Auto ICR
- Up to 15m IR range
- Outdoor
- POE

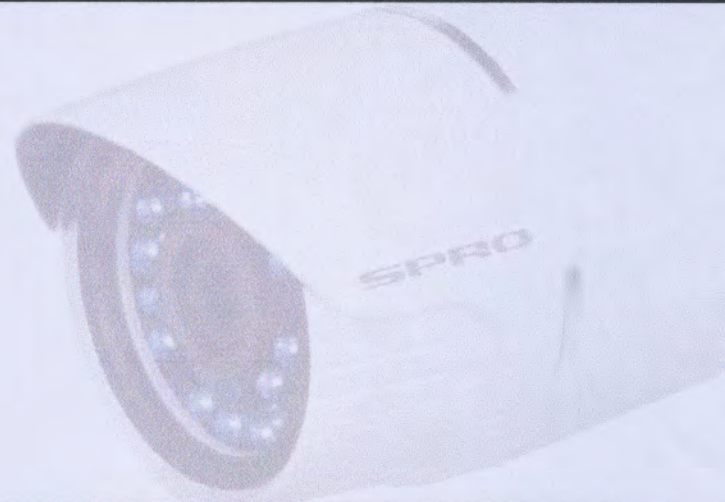


SPECIFICATIONS

Model Number	SPIPQ20/36R-EC
Image Sensor	1/2.7" Progressive Scan CMOS
Day/Night	AUTO ICR
Min. Illumination	0.1lux @F1.2, AGC on, 0 lux with IR on
Lens	3.6mm Fixed Lens
IR LED	24Leds
IR Distance	3-20m
Electronic Shutter	1/20~1/30000s
Compression	H.264/M-JPEG

(continued)

(continued)

Max.image Resolution	2 Megapixel (1920x1080)
Frame Rate	1080P @ 25fps
Bit Rate	Main Stream: 1000~12000kps, Sub Stream: 512~2048kbps
Protocol	TCP/IP, UDP, HTTP, DHCP, DNS, DDNS, RTP, RTSP, PPPoE, SMTP, NTP, SNMP, FTP, UPNP, NTP
PC Client and Browser	SPRO ISS, IE6.0 and above, Google Chrome, Mozilla Firefox, Mac Safari
Mobile phone	iPhone, iPad, Android
Alarm Input	N/A
Alarm Output	N/A
LAN	1 RJ45 10M / 100M ethernet port
Working Temperature	-10°C~ +50°C
Working Humidity	0% - 90%
Waterproof	Yes
Power Supply	12 VDC ± 10% , PoE(802.3af)
Consumption	4.2W IR ON, 2.4W IR OFF
Dimension	67*67*170mm
Weight	320g

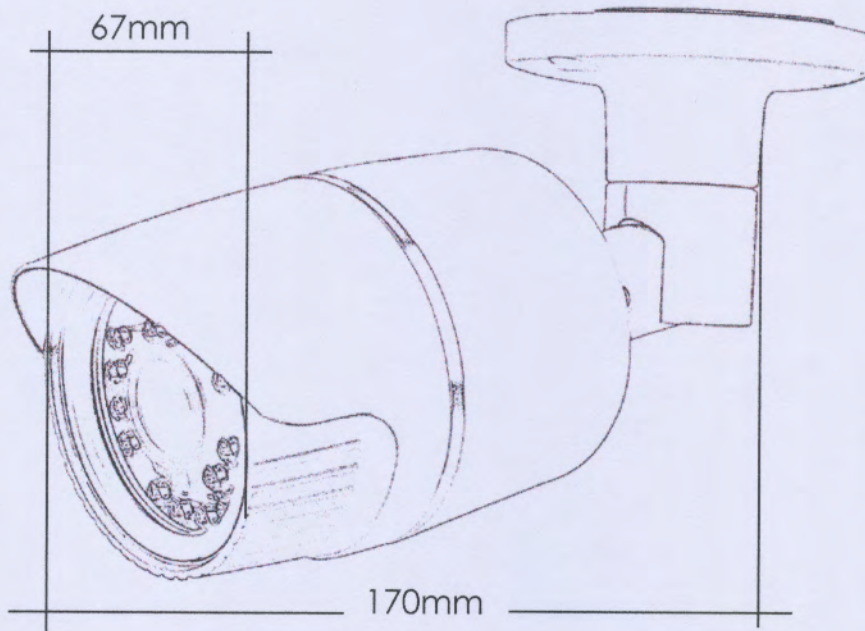

All specifications are subject to change without notice. Copyright © Luxrite Ltd. All rights reserved